

Features


Unregulated Converters

- Low cost 1W converter
- Industry standard pinout
- SIP7 package
- 1kVDC isolation
- Efficiency up to 80%
- UL60950-1, CAN/CSA C22.2 No. 60950-1 certified

RECOM
DC/DC Converter

RFB

1 Watt
SIP7
Single Output

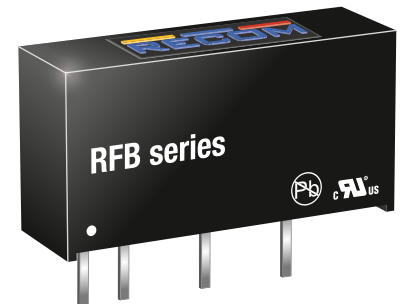

UL US
E358085

UL60950-1 certified
CAN/CSA-C22.2 No 60950-1 certified
EN55032 compliant

Description

The RFB DC/DC converter is typically used in cost sensitive general purpose power isolation and voltage matching applications. Despite its low cost, it is a fully specified converter with 1kVDC isolation, industrial operating temperature range of -40°C to +85°C without derating and UL/EN certifications.

Selection Guide


| Part Number | Input Voltage [VDC] | Output Voltage [VDC] | Output Current [mA] | Efficiency ⁽¹⁾ typ. [%] | Max. Capacitive Load ⁽²⁾ [μF] |
|-------------|---------------------|----------------------|---------------------|------------------------------------|--|
| RFB-0505S | 5 | 5 | 200 | 80 | 1000 |

Notes:

Note1: Efficiency is tested at nominal input and full load at +25°C ambient

Note2: Max. Cap Load is tested at nominal input and full resistive load

Model Numbering

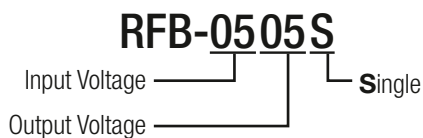

Specifications (measured @ Ta= 25°C, nominal input voltage, full load and after warm-up)

BASIC CHARACTERISTICS

| Parameter | Condition | Min. | Typ. | Max. |
|--|-----------------------------|----------|---------------------|-----------|
| Internal Input Filter | | | | capacitor |
| Input Voltage Range | | | ±10% | |
| Input Surge Voltage | 100μs | -0.65VDC | | 9VDC |
| Input Current | max. load | | 250mA | |
| Quiescent Current | nom. Vin = 5VDC | | 25mA | 30mA |
| Minimum Load ⁽³⁾ | | 0% | | |
| Internal Operating Frequency | | 50kHz | 82kHz | 105kHz |
| Output Ripple and Noise ⁽⁴⁾ | 20MHz BW | | 55mVp-p | 100mVp-p |
| Reflected Back Ripple Current | 20MHz BW, no external choke | | 20mA _{p-p} | |

Notes:


Note3: Operation below 10% load will not harm the converter, but specifications may not be met

Note4: Measurements are made with a 100nF MLCC across output (low ESR)

continued on next page

Specifications (measured @ Ta= 25°C, nominal input voltage, full load and after warm-up)


Efficiency vs. Load
(nominal Vin= 5VDC)

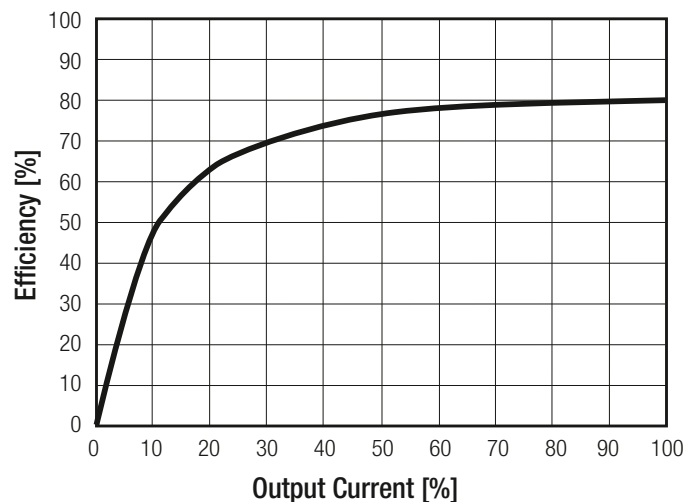

REGULATIONS

| Parameter | Condition | Values |
|-----------------|----------------------------------|-----------------------------------|
| Output Accuracy | | -2% typ. / $\pm 5.0\%$ max. |
| Line Regulation | low line to high line, full load | $\pm 1.2\%$ typ. / $\pm 1\%$ max. |
| Load Regulation | 10% to 100% | $\pm 10\%$ typ. / $\pm 15\%$ max. |

Tolerance Envelope

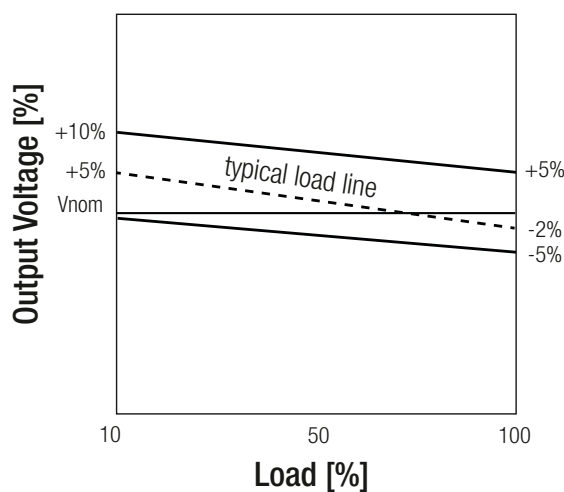

PROTECTIONS

| Parameter | Condition | | Value |
|----------------------------------|--------------|---|----------------------------|
| Short Circuit Protection (SCP) | below 100mΩ | | short term protection mode |
| Isolation Voltage ⁽⁵⁾ | I/P to O/P | tested for 1 second rated for 1 minute | 1kVDC 500VAC/60Hz |
| Isolation Resistance | | | 1GΩ min. |
| Isolation Capacitance | | | 75pF max. |
| Leakage Current | 500VAC, 50Hz | | 1μA max. |
| Insulation Grade | | | Functional |

Notes:

Note5: For repeat Hi-Pot testing, reduce the time and/or the test voltage


Specifications (measured @ Ta= 25°C, nominal input voltage, full load and after warm-up)

ENVIRONMENTAL

| Parameter | Condition | | Value |
|-----------------------------|---|------------------|---|
| Operating Temperature Range | (@ natural convection 0.1m/s) (see graph) | without derating | -40°C to +85°C |
| Maximum Case Temperature | | | +105°C |
| Temperature Coefficient | | | ±0.05%/°C |
| Thermal Impedance | 0.1 m/s, horizontal direction | | 40°C/W |
| Operating Altitude | | | 2000m |
| Operating Humidity | non-condensing | | 95% RH max. |
| Pollution Degree | | | PD2 |
| Vibration | | | MIL-STD-202G |
| MTBF | according to MIL-HDBK-217F, G.B. | +25°C +85°C | 13200 x 10 ³ hours 5200 x 10 ³ hours |

Derating Graph

(@ Chamber and natural convection 0.1 m/s)

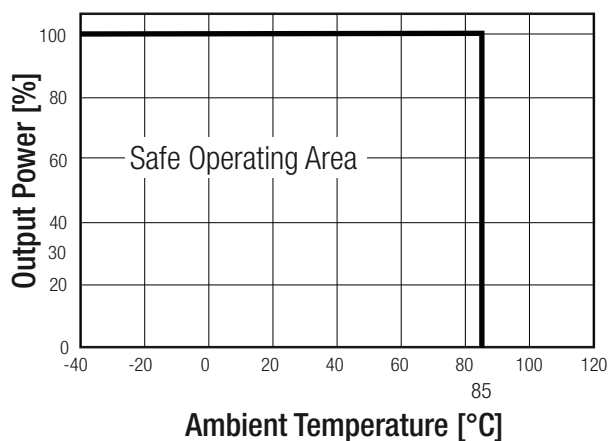


SAFETY AND CERTIFICATIONS

| Certificate Type (Safety) | Report/File Number | Standard |
|---|--------------------|---|
| Information Technology Equipment, General Requirements for Safety | E358085-A4 | UL60950-1, 2nd Edition, 2007 |
| | | CSA C22.2 No. 60950-1-07, 2nd Edition, 2007 |
| RoHs 2+ | | RoHS 10/10, 2015 |

EMC Compliance

| Condition | Standard / Criterion |
|---|----------------------|
| Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement with external filter (see below filter suggestion) | EN55032, Class A, B |

EMC Filtering - Suggestions for Class A and B

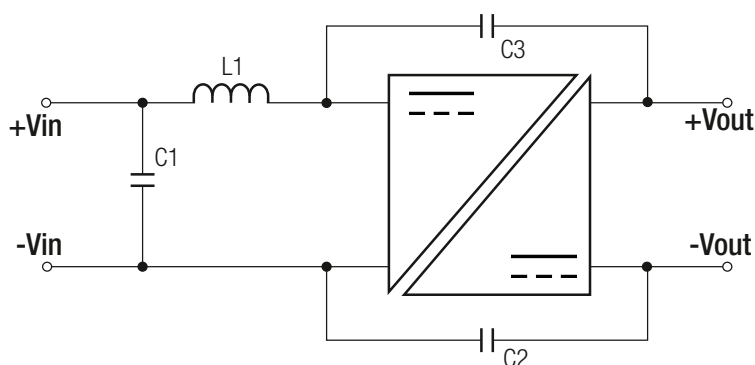

| Component List Class A | | | |
|------------------------|----|----|----|
| C1 | L1 | C2 | C3 |
| 6.8μF | - | - | - |



| Component List Class B | | | |
|------------------------|------|---------|-----------|
| C1 | L1 | C2 | C3 |
| 10μF | 22μH | 1nF/1kV | 2.2nF/1kV |

Specifications (measured @ Ta= 25°C, nominal input voltage, full load and after warm-up)



DIMENSION AND PHYSICAL CHARACTERISTICS

| Parameter | Type | Value |
|---------------------------|-----------------|---|
| Material | case potting | non-conductive black plastic (UL94 V-0) epoxy (UL94 V-2) |
| Package Dimension (LxWxH) | | 19.6 x 6.0 x 10.2mm |
| Package Weight | | 2.2g |

Dimension Drawing (mm)

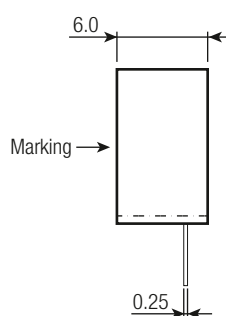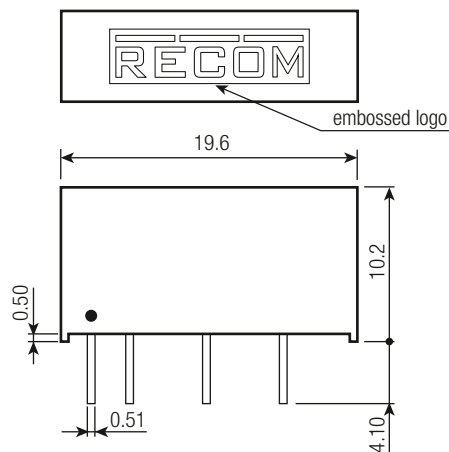

Recommended Footprint Details

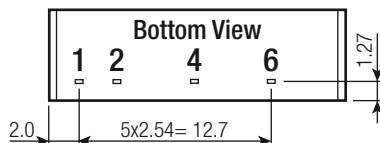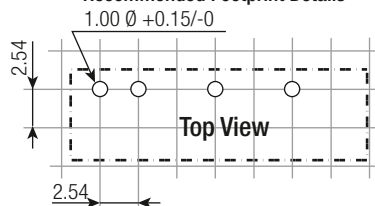

Pin Connections

| Pin # | Function |
|-------|----------|
| 1 | +Vin |
| 2 | -Vin |
| 4 | -Vout |
| 6 | +Vout |

Tolerance: xx.x= ±0.5mm
xx.xx= ±0.25mm

Pin tolerance:
Thickness: ±0.05mm
Length: +0.25/-0.50mm

PACKAGING INFORMATION

| Parameter | Type | Value |
|-----------------------------|------|----------------------|
| Packaging Dimension (LxWxH) | tube | 520.0 x 16.0 x 9.0mm |
| Packaging Quantity | | 25pcs |
| Storage Temperature Range | | -55°C to +125°C |
| Storage Humidity | | 5% - 95%, RH |

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[RECOM:](#)

[RFB-0505S](#)